

# Assembly Instructions

If you need help or have damaged or missing parts, please email: [info@kingyesoutdoor.com](mailto:info@kingyesoutdoor.com)

**Caution:** Please do not over-tighten bolts and screws during assembly.

## Folding Chair

This Adirondack chair can be easily folded flat by pulling out the "Plug (L)" inserted in the chair legs.

Pull out the plugs and slightly lift the backrest for easy folding.

Please make sure that the plugs are not stuck in the middle.

To avoid damage, please keep the plugs inserted when the chair is in use.

## Reclining Chair

This Adirondack chair's backrest have 3 different reclining angles.

You must lift the armrests and pull them backward or forward to adjust the backrest angle. There is a small groove at the bottom of the armrest where your fingers should go when you lift the armrests.

- Lift both the armrests.
- Pull forward or backward to adjust the backrest to a particular position;
- Then put the armrests down to let bolts rest on the notches simultaneously. (Please do not lay on the backrest when you are adjusting)

## Retractable Ottoman


When using it as a practical Adirondack Chair, the pull-out footrest provides a withdrawable ottoman, and the cupholders allow you to place your favourite drinks.

# Assembly Instructions



## Adjustable Backrest Adirondack Chair

A041-047-001

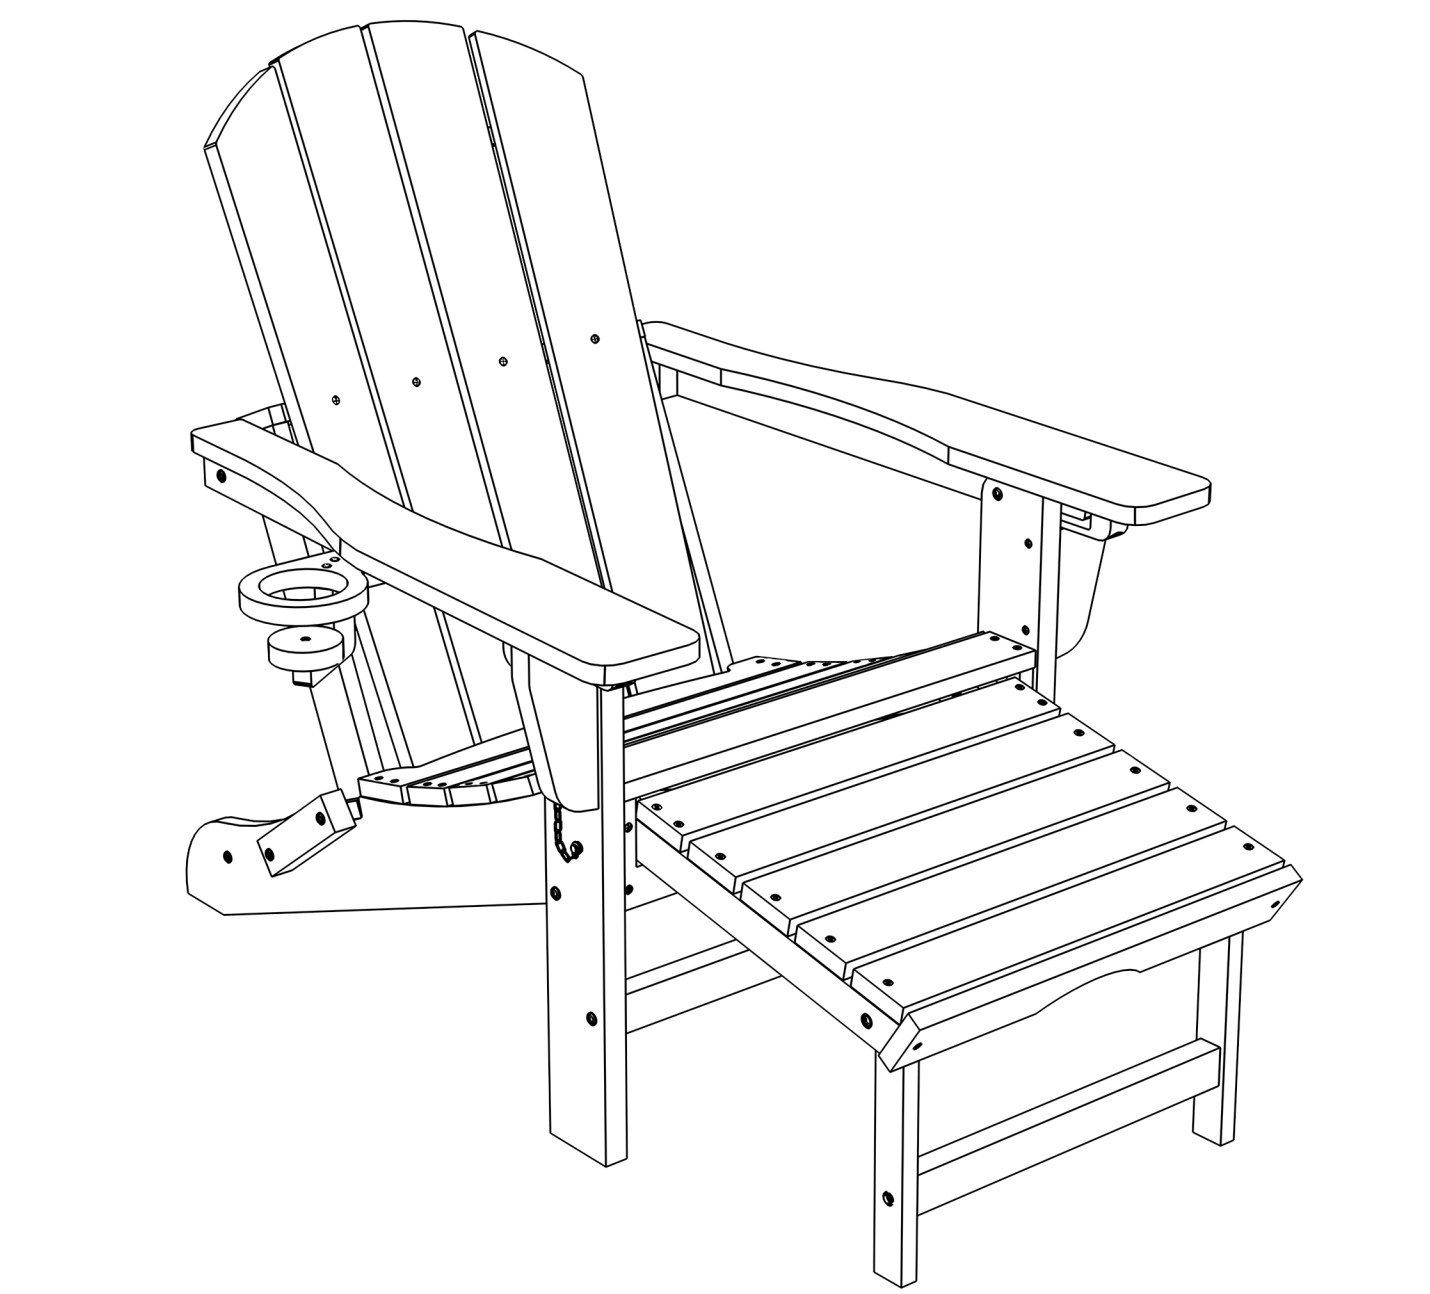

**Important - Please read these instructions fully before starting assembly**

**HASSLE-FREE WARRANTY**  
Kingyes stand behind the quality of our products.  
For full warranty policy, email: [info@kingyesoutdoor.com](mailto:info@kingyesoutdoor.com)

# Safety & Care Advice

If you need help or have damaged or missing parts, please email: [info@kingyesoutdoor.com](mailto:info@kingyesoutdoor.com)

**Important - Please read these instructions fully before starting assembly**

Check you have all the components and tools listed on the pages 3. Do not stand or put weight on the product, this could cause damage.

Remove all fittings from the plastic bags and separate them into their groups. Assemble the item as close to its final position (in the same area) as possible.

Keep children and animals away from the work area, small parts may cause choking if swallowed. Do not place furniture directly in front of radiators, fires or any other source of heat.

Make sure you have enough space to layout the parts before starting.

Assemble on a soft level surface to avoid damaging the unit or your floor.

350 LBS CAPACITY    1 PERSON ASSEMBLY    AROUND 20 MIN. ASSEMBLY

*The assembly will be easier with two people while one person could also do the job.*

## General care & maintenance

Using damp cloth and mild detergent for routine maintenance, do not use bleach or abrasive cleaners. From time to time check that there are no loose screws on this unit.

## Clean & Sanitize Tips

Use this method for a quick clean-up here and there throughout the season — adding in the bleach solution to easily sanitize and eliminate any stubborn stains or dirt build-up from the winter months.

- Mix mild dish soap and warm water in a bucket.
- Use a clean cloth to wipe the soapy mixture onto the surfaces of your furniture, cleaning off any dirt.
- For extra cleaning power or to sanitize, mix 1/3 bleach and 2/3 water.
- Apply bleach mixture to furniture with a clean cloth and allow it to sit on the lumber for a few minutes (this will not affect the color).
- Loosen any dirt and debris that may catch in the surface grooves of the lumber by scrubbing the bleach mixture with a soft-bristle brush.
- Rinse thoroughly using a garden hose with a spray nozzle.

# Components

If you need help or have damaged or missing parts, please email: [info@kingyesoutdoor.com](mailto:info@kingyesoutdoor.com)

Please check you have all the components listed below.

Note: The illustration of the chair shows the exact position of each part. Check when assembling.

#	Description	Qty.
A	Seat Frame	1
B	Right Leg	1
C	Left Leg	1
D	Right Arm	1
E	Left Arm	1
F	Backrest	1
G	Back Stretcher	1
H	Front Stretcher	1
I	Braces	2
K	Cup Holder	1
L	Foot Support	1

## Hardware & Tools

Note: The quantities below are the correct amount to complete the assembly. In some cases more fittings may be supplied than required.

1 x 2: M5 x 50MM Screws  
 2 x 6: M6 x 40MM Bolts  
 3 x 2: M6 x 50MM Bolts  
 4 x 2: M6 x 60MM Bolts  
 5 x 1: M6 x 30MM Bolts  
 6 x 2: M6 x 80MM Bolts  
 7 x 2: M6 x 80MM Bolts (Short thread)  
 8 x 9: Washer  
 9 x 8: Nut  
 Hex Key (Included)  
 Wrench (Included)

# Assembly Instructions

If you need help or have damaged or missing parts, please email: [info@kingyesoutdoor.com](mailto:info@kingyesoutdoor.com)

**Caution:** Please do not over-tighten bolts and screws during assembly.

**STEP 1**  
● Attach "Chair Legs (B/C)" to "Seat Frame (A)" - Using "4 M6 x 60MM Bolts" with "8 Washer" and "9 Nut", tighten with hex key and wrench.

**STEP 2**  
● Attach "Front Stretcher (H)" to "Chair Legs (B/C)" - Using "2 M6 x 40MM Bolts", tighten with hex key.

**STEP 3**  
● Attach "Cup Holder (K)" to "Right Arm (D)" - Using "5 M6 x 30MM Bolts" and "8 Washer", tighten with hand.

**STEP 4**  
● Attach "Chair Arms (D/E)" to "Chair Legs (B/C)" - Using "7 M6 x 80MM Bolts" with "8 Washer" and "9 Nut", tighten with hex key and wrench.

**[ATTENTION]**  
Please do not over tighten nuts at this step, ensure the bolts can adjust for backrest reclining.

# Assembly Instructions

If you need help or have damaged or missing parts, please email: [info@kingyesoutdoor.com](mailto:info@kingyesoutdoor.com)

**Caution:** Please do not over-tighten bolts and screws during assembly.

**STEP 5**  
● Attach "Chair Arm (D/E)" to "Backrest (F)" - Using "6 M6 x 80MM Bolts" with "8 Washer" and "9 Nut", tighten with hex key.

**STEP 6**  
● Attach "Backrest (F)" to "Seat Frame (A)" with "Brace (I)" - Using "3 M6 x 50MM Bolts" with "8 Washer" and "9 Nut" in the back legs, and using "2 M6 x 40MM Bolts" on the backrest frame, tighten with hex key and wrench.

**STEP 7**  
● Attach "Back Stretcher (G)" to "Seat Frame (A)" - Using "2 M6 x 40MM Bolts", tighten with hex key.

**STEP 8**  
● Attach "Foot Support (L)" to the footrest of "Seat Frame (A)" - Using "1 M5 x 50MM Screws", tighten with hex key.